


Inspection

Roller inspection conveyor

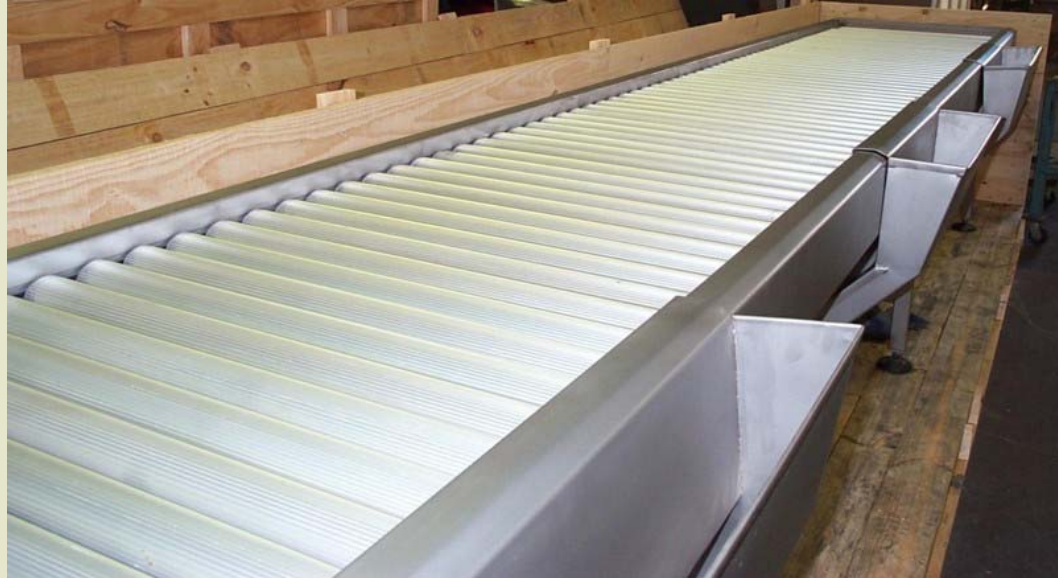

➤Capacity: up to 16 tonne per hour ➤Product: root crop

Machine Description:

The conveyor consists of a number of ribbed aluminium or smooth plastic rollers equally spaced and situated between two chains between the end sprockets.

The rollers are pulled along with the chains and are, at the same time, rotating as they

run over two strips of rubber underneath the roller.

The product is fed onto the conveyor and will roll around constantly due to the rotation of the rollers and at the same time be carried forward.

This give a complete exposure of the product to the operator.

Tripax

Tel: +61 (0)3 9760 6700
Fax: +61 (0)3 9762 9018
Email: sales@tripax.com.au
Website: www.tripax.com.au

Jorgensen

Tel: +45 63 13 22 11
Fax: + 45 63 13 22 22
Email: jorgensen@rbj.dk
Website: www.jorgensen.dk